KAIXI XPS INSULATION

EXTRUDED POLYSTYRENE (XPS) FOAM INSULATION

G-20/30/40/50/60/80/100


KAIXI XPS-G-20/30/40/50/60/80/100 is a high-strength extruded polystyrene (XPS) insulation material engineered for demanding applications that require enhanced load-bearing capacity. It is ideal for use in:
*****Under-slab insulation
*****Concrete floors
*****Foundations
*****Roadways and rail beds
*****Plaza and parking decks
*****Cold storage facilities
Additionally, KAIXI XPS-G-20/30/40/50/60/80/100 is suitable for tapered insulation systems where higher compressive strength is essential.

KAIXI XPS-G-20/30/40/50/60/80/100 es un material de aislamiento extruido (XPS) de alta resistencia diseñado para aplicaciones exigentes que requieren una capacidad de carga mejorada. Es ideal para usar en:
***** Aislamiento debajo del bizco
***** Pisos de concreto
*****Cimientos
***** Carreteras y camas de riel
***** Plaza y mazos de estacionamiento
***** Instalaciones de almacenamiento en frío
Además, Kaixi XPS-G-20/30/40/50/60/80/100 es adecuado para sistemas de aislamiento cónico donde es esencial una mayor resistencia a la compresión.


Features /特点



SUPERIOR MOISTURE RESISTANCE
优质的耐水性



DURABLE
耐用性能强

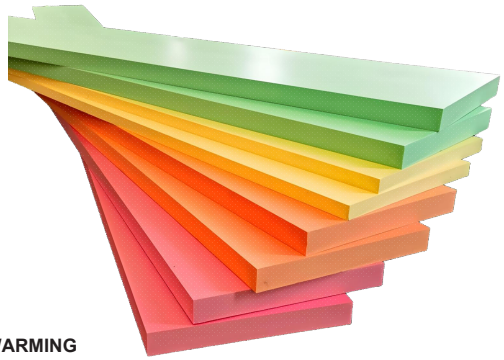



COMPRESSIVE STRENGTH
抗压强度强



80% GLOBAL WARMING REDUCTION
减缓全球变暖

Specification

Application	Attic/Hotel/Office Building/Port /Warehouse/Roadground etc.	Lugares aplicables	Loft/Hotel/Office Building/Port/Warehouse/Roadbed
Material	Polystyrene	Material	Poliestireno
Flammability rating	B1	Inflamabilidad	Nivel B1
Compressive Strength	>150 Kpa	Resistencia a la compresión	>150 Kpa
Operating Temperature	`-50°c to 75°c	Temperatura de funcionamiento	`-50 ° C a 75 ° C
Project Solution Capability	total solution for projects, Others, graphic desig	Solución	Proporcionar soluciones basadas en dibujos de diseño
Type	XPS Foam Board	tipo	Tablero extruido XPS
Place of Origin	Guangdong China	país natal	Guangdong, China
Color	bule/white/yellow/black	color	Azul/rosa/blanco/amarillo/naranja/personalizado
Shape	rectangle/squarec	Forma	Rectángulo/cuadrado
Function	Heat Preservation	Función	Aislamiento y aislamiento térmico
Thermal conductivity	≤0.03	Conductividad térmica	≤0.03
compressive strength	150-1200kpa	Resistencia a la compresión	150-1200KPA
density	25-60 Kg/m3	La densidad es	25-60 kg/m3
Length(cm)	120/122/180/240/600/customized	Longitud (cm)	120/122/180/220/600/personalizado
Width(cm)	30/60/100/120cm/customized	Ancho (cm)	30/60/100/120cm/personalizado
Thickness(cm)	2/3/4/5/6/7/8/10/12/15/20/customized	Espesor (cm)	2/3/4/5/6/7/8/10/12/15/20/personalizado

Properties shown are representative values for 1-cm-thick material, unless otherwise specified.

Packing: Shipped in poly-wrapped units with individually wrapped or banded bundles.

CONTACT US
Get your customized solution now:
Email: info@ledsunwell.com +86-20-34528055 / +86-13902321538